



1126

HSS DIN 1870 N



Avance/feed	P				M		K			N				S		H	
	<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC
	●						●	●		○	●		○				
	15-35						25-30	12-16		50-60	30-60		20-25				
Ø2	0,02-0,06						0,04-0,06	0,04-0,06		0,02-0,05	0,02-0,05		0,03-0,04				
Ø5	0,08-0,12						0,08-0,12	0,05-0,12		0,05-0,12	0,05-0,10		0,06-0,07				
Ø10	0,12-0,30						0,20-0,30	0,18-0,30		0,18-0,24	0,18-0,24		0,12-0,13				
Ø15	0,18-0,40						0,30-0,40	0,20-0,40		0,20-0,32	0,20-0,32		0,16-0,17				
Ø20	0,22-0,46						0,35-0,46	0,25-0,46		0,25-0,37	0,25-0,37		0,25-0,26				

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

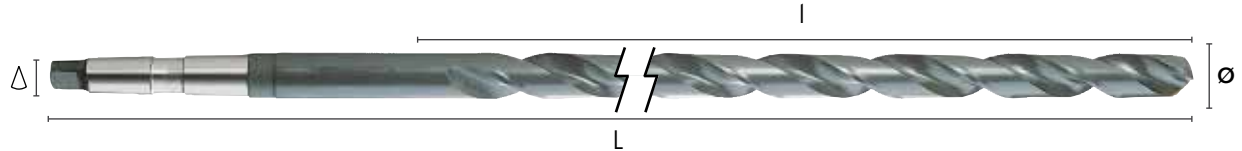

△	Ø mm	L mm	l mm	Icon
1	8,00	265	165	1
1	8,00	330	210	1
1	8,50	265	165	1
1	8,50	330	210	1
1	9,00	275	175	1
1	9,00	345	220	1
1	9,50	275	175	1
1	9,50	345	220	1
1	10,00	285	185	1
1	10,00	360	235	1
1	10,50	285	185	1
1	10,50	360	235	1
1	11,00	300	195	1
1	11,00	375	250	1
1	11,50	300	195	1
1	11,50	375	250	1
1	12,00	310	205	1
1	12,00	395	260	1
1	12,50	310	205	1
1	12,50	395	260	1
1	13,00	310	205	1
1	13,00	395	260	1
1	13,50	325	220	1
1	13,50	410	275	1
1	14,00	325	220	1
1	14,00	410	275	1
2	14,50	340	220	1
2	14,50	425	275	1
2	15,00	340	220	1
2	15,00	425	275	1
2	15,50	355	230	1
2	15,50	445	295	1
2	16,00	355	230	1
2	16,00	445	295	1
2	16,50	355	230	1
2	16,50	445	295	1
2	17,00	355	230	1
2	17,00	445	295	1
2	17,50	370	245	1
2	17,50	465	310	1
2	18,00	370	245	1
2	18,00	465	310	1
2	18,50	370	245	1
2	18,50	465	310	1
2	19,00	370	245	1
2	19,00	465	310	1
2	19,50	385	260	1
2	19,50	490	325	1

△	Ø mm	L mm	l mm	Icon
2	20,00	385	260	1
2	20,00	490	325	1
2	20,50	385	260	1
2	20,50	490	325	1
2	21,00	385	260	1
2	21,00	490	325	1
2	21,50	405	270	1
2	21,50	515	345	1
2	22,00	405	270	1
2	22,00	515	345	1
2	22,50	405	270	1
2	22,50	515	345	1
2	23,00	405	270	1
2	23,00	515	345	1
3	23,50	425	270	1
3	23,50	535	345	1
3	24,00	440	290	1
3	24,00	555	365	1
3	24,50	440	290	1
3	24,50	555	365	1
3	25,00	440	290	1
3	25,00	555	365	1
3	25,50	440	290	1
3	25,50	555	365	1
3	26,00	440	290	1
3	26,00	555	365	1
3	26,50	440	290	1
3	26,50	555	365	1
3	27,00	460	305	1
3	27,00	580	385	1
3	27,50	460	305	1
3	27,50	580	385	1
3	28,00	460	305	1
3	28,00	580	385	1
3	28,50	460	305	1
3	28,50	580	385	1
3	29,00	460	305	1
3	29,00	580	385	1
3	29,50	460	305	1
3	29,50	580	385	1
3	30,00	460	305	1
3	30,00	580	385	1
3	31,00	480	320	1
3	31,00	610	410	1
4	32,00	505	320	1
4	32,00	635	410	1
4	33,00	505	320	1
4	33,00	635	410	1


1126

HSS DIN 1870 N



		P				M		K			N				S		H		
		<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
		●						●	●		○	●		○					
		15-35						25-30	12-16		○ 50-60	30-60		○ 20-25					
Avance /feed	Ø2	0,02-0,06						0,04-0,06	0,04-0,06		0,02-0,05	0,02-0,05		0,03-0,04					
	Ø5	0,08-0,12						0,08-0,12	0,05-0,12		0,05-0,12	0,05-0,10		0,06-0,07					
	Ø10	0,12-0,30						0,20-0,30	0,18-0,30		0,18-0,24	0,18-0,24		0,12-0,13					
	Ø15	0,18-0,40						0,30-0,40	0,20-0,40		0,20-0,32	0,20-0,32		0,16-0,17					
	Ø20	0,22-0,46						0,35-0,46	0,25-0,46		0,25-0,37	0,25-0,37		0,25-0,26					

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

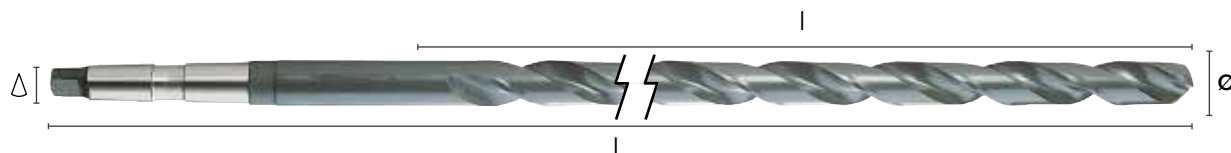

	△	Ø mm	L mm	l mm	📦
4		34,00	530	340	1
4		34,00	665	430	1
4		35,00	530	340	1
4		35,00	665	430	1
4		36,00	530	340	1
4		36,00	665	430	1
4		37,00	530	340	1
4		37,00	665	430	1
4		38,00	555	360	1
4		38,00	695	460	1
4		39,00	555	360	1
4		39,00	695	460	1

	△	Ø mm	L mm	l mm	📦
4		40,00	555	360	1
4		40,00	695	460	1
4		41,00	695	460	1
4		42,00	695	460	1
4		43,00	735	490	1
4		44,00	735	490	1
4		45,00	735	490	1
4		46,00	735	490	1
4		47,00	735	490	1
4		48,00	765	510	1
4		49,00	765	510	1
4		50,00	765	510	1