


1166

HSSCO DIN 1897 S



		P				M		K			N				S		H		
		<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
		● 15-30	● 12-20	● 6-16		○ 8-14					● 30-80		● 50-70						
Avance/feed	Ø2	0,02-0,06	0,02-0,03	0,01-0,04		0,01-0,04					0,02-0,05		0,02-0,04						
	Ø5	0,08-0,12	0,05-0,07	0,04-0,09		0,05-0,09					0,05-0,12		0,05-0,09						
	Ø10	0,12-0,30	0,12-0,18	0,09-0,18		0,14-0,21					0,18-0,24		0,18-0,21						
	Ø15	0,18-0,40	0,18-0,24	0,12-0,28		0,20-0,28					0,20-0,32		0,20-0,28						
	Ø20	0,22-0,46	0,22-0,28	0,14-0,33		0,22-0,33					0,25-0,37		0,25-0,33						

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

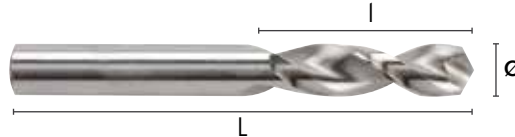

Ø mm	L mm	l mm	
2,00	38	12	10
2,50	43	14	10
2,80	46	16	10
3,00	46	16	10
3,10	49	18	10
3,20	49	18	10
3,30	49	18	10
3,40	52	20	10
3,50	52	20	10
3,60	52	20	10
3,70	52	20	10
3,80	55	22	10
3,90	55	22	10
4,00	55	22	10
4,10	55	22	10
4,20	55	22	10
4,30	58	24	10
4,40	58	24	10
4,50	58	24	10
4,60	58	24	10
4,70	58	24	10
4,80	62	26	10
4,90	62	26	10
5,00	62	26	10
5,10	62	26	10
5,20	62	26	10
5,30	62	26	10
5,40	66	28	10
5,50	66	28	10
5,60	66	28	10

Ø mm	L mm	l mm	
5,70	66	28	10
5,80	66	28	10
5,90	66	28	10
6,00	66	28	10
6,10	66	28	10
6,20	70	31	10
6,50	70	31	10
6,80	70	31	10
7,00	74	34	10
7,20	74	34	10
7,50	74	34	10
7,80	74	34	10
8,00	79	37	10
8,20	79	37	10
8,50	79	37	10
8,80	79	37	10
9,00	84	40	10
9,20	84	40	10
9,50	84	40	10
9,80	84	40	10
10,00	89	43	10
10,50	89	43	5
11,00	89	43	5
11,50	95	47	5
12,00	95	47	5
13,00	102	51	5
14,00	102	51	5
15,00	107	54	4
16,00	111	56	4