

2101/5

HSSE DIN 376/374

Izquierda
a gauche
left hand

M-MF

DIN 13

Form.

C




Tol.

6H

LH




1,5XD

D

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
● 10-25	○ 10-15						○ 10-15			○ 10-20							

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

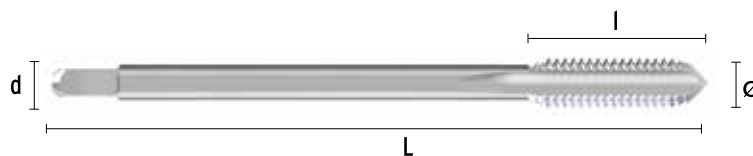

Ø	P	L mm	I mm	∠ mm	d mm
*M5,0	0,80	70	14	2,70	3,5
*M8,0	1,25	90	20	4,90	6,0
*M9,0	1,25	90	20	5,50	7,0
M12,0	1,75	110	24	7,00	9,0
M14,0	2,00	110	25	9,00	11,0
M16,0	2,00	110	32	9,00	12,0

Ø	P	L mm	I mm	∠ mm	d mm
M18,0	2,50	125	32	11,00	14,0
M20,0	2,50	140	32	12,00	16,0
M22,0	2,50	140	32	14,50	18,0
M24,0	3,00	160	38	14,50	18,0
*M30,0	3,50	180	40	18,00	22,0

*Hasta fin de existencias / Jusqu'à épuisement des stocks / Until end of stock