

2105/5

HSSE DIN 376/374

Izquierda
 a gauche / left-hand

M
 DIN13

Form.
C



Tol.
6H




2,5XD

D

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
● 10-25	○ 10-15			○ 5-10		○ 10-15	○ 10-15		○ 10-15	● 10-20		○ 10-15					

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

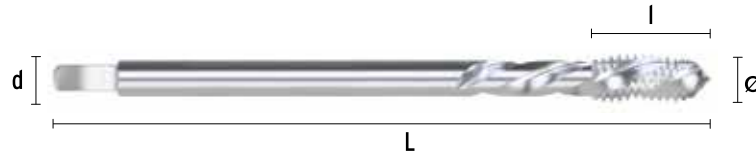

Ø	P	L mm	l mm	mm	d mm
M8,0	1,00	90	10	4,90	6,0
M10,0	1,00	90	10	5,50	7,0
M10,0	1,25	100	16	5,50	7,0
M12,0	1,25	100	15	7,00	9,0
M12,0	1,75	110	18	7,00	9,0
M16,0	1,50	100	15	9,00	12,0
M16,0	2,00	110	20	9,00	12,0

Ø	P	L mm	l mm	mm	d mm
M18,0	1,50	110	17	11,00	14,0
M20,0	1,50	125	20	12,00	16,0
M20,0	2,00	140	20	12,00	16,0
M20,0	2,50	140	25	12,00	16,0
M22,0	2,00	140	20	14,50	18,0
M24,0	2,00	140	20	14,50	18,0
M24,0	3,00	140	20	14,50	18,0