

2135

HSSE DIN 376

BSW
BS 84

Form.
C




1,5XD

D

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
● 10-25	○ 10-15						○ 10-15			○ 10-20							

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

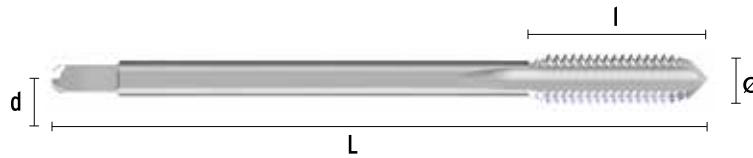

Ø	P	L mm	l mm	mm	d mm
1/8	40,00	56	11	2,10	2,8
5/32	32,00	63	13	2,10	2,8
3/16	24,00	70	16	2,70	3,5
7/32	24,00	80	18	3,40	4,5
1/4	20,00	80	18	3,40	4,5
5/16	18,00	90	20	4,90	6,0
7/16	14,00	100	22	6,20	8,0
9/16	12,00	110	30	9,00	11,0

Ø	P	L mm	l mm	mm	d mm
1*3/8	6,00	200	55	22,00	28,0
1*1/2	6,00	200	55	24,00	32,0
1*5/8	5,00	220	60	24,00	32,0
1*3/4	5,00	220	62	29,00	36,0
1*7/8	4,50	250	70	29,00	36,0
2"	4,50	250	70	32,00	40,0
2*1/4	4,00	280	78	35,00	45,0
2*1/2	4,00	315	90	39,00	50,0

*Hasta fin de existencias / Jusqu'à épuisement des stocks / Until end of stock