

2135/5

HSSE DIN 376

Izquierda
a gauche / lefthand

BSW
BS 84

Form.
C




1,5XD

D

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
● 10-25	○ 10-15						○ 10-15			○ 10-20							

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

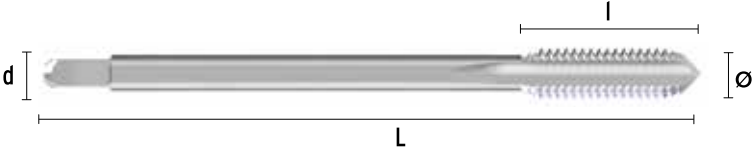

Ø	P	L mm	l mm	mm	d mm
1/4	20,00	80	18	3,40	4,5
5/16	18,00	90	20	4,90	6,0
3/8	16,00	100	22	5,50	7,0
1/2	12,00	110	27	7,00	9,0

Ø	P	L mm	l mm	mm	d mm
9/16	12,00	110	30	9,00	11,0
5/8	11,00	110	30	9,00	12,0
7/8	9,00	140	36	14,50	18,0
1"	8,00	160	38	14,50	18,0

*Hasta fin de existencias / Jusqu'à epuiseiment des stocks / Until end of stock