

2142

HSSE DIN 374

BSF
BS 84

Form.
C




1,5XD

D

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
● 10-25	○ 10-15						○ 10-15			○ 10-20							

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

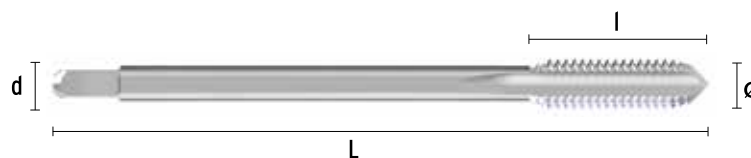

Ø	P	L mm	l mm	∠ mm	d mm
7/16	18,00	100	20	6,20	8,0
9/16	16,00	110	23	9,00	11,0
5/8	14,00	110	28	9,00	12,0

Ø	P	L mm	l mm	∠ mm	d mm
7/8	11,00	140	34	14,50	18,0
1"	10,00	140	28	16,00	20,0

*Hasta fin de existencias / Jusqu'à épuisement des stocks / Until end of stock