


2147/5		HSSE DIN 376	Izquierda a gauche / lefthand	UNC	Form.			Tol.	1,5XD	D							
				ANSI/ASME B1.1	C			2B									
P			M		K			N		S		H					
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
● 10-25	○ 10-15						○ 15-20			○ 10-20							

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

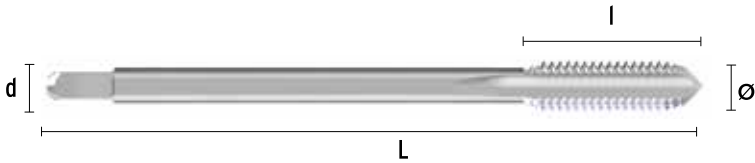

Ø	P	L mm	I mm	∠ mm	d mm
1/4	20,00	80	18	3,40	4,5
5/16	18,00	90	20	4,90	6,0
3/8	16,00	100	22	5,50	7,0
7/16	14,00	100	22	6,20	8,0

Ø	P	L mm	I mm	∠ mm	d mm
9/16	12,00	110	30	9,00	11,0
5/8	11,00	110	30	9,00	12,0
7/8	9,00	140	36	14,50	18,0

*Hasta fin de existencias / Jusqu'à épuisement des stocks / Until end of stock



Aceros
Aciers
Steels
Stähle



Aceros Inox
Aciers Inox
Stainless Steels
Edelstahl



Fundición
Fonte
Cast Iron
Gusseisen



Metales no ferrosos
Métal non Ferreux
Non Ferrous metals
NE-Metalle



Titanio y Superalloys
Titanium et Superalloys
Titanium and Superalloys
Titan und Superlegierungen



Materiales Duros
Materiels Durs
Hard materials
Hartmaterialien