

2153/5

HSSE DIN 374

Izquierda
a gauche / lefthand

UNF
ANSI/ASME
B1.1

Form.
C




Tol.
2B

1,5XD

D

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
● 10-25	○ 10-15						○ 10-15			○ 10-20							

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

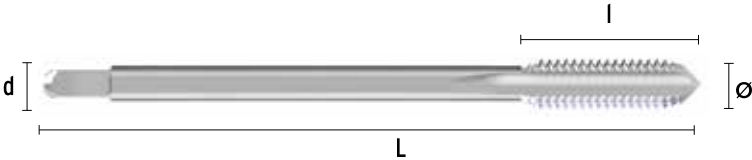

Ø	P	L mm	I mm	mm	d mm
1/4	28,00	80	18	3,40	4,5
3/8	24,00	90	20	5,50	7,0
7/16	20,00	100	22	6,20	8,0
1/2	20,00	100	22	7,00	9,0

Ø	P	L mm	I mm	mm	d mm
9/16	18,00	100	22	9,00	11,0
3/4	16,00	110	25	11,00	14,0
7/8	14,00	125	25	14,50	18,0
1"	12,00	140	27	16,00	20,0

*Hasta fin de existencias / Jusqu'à épuisement des stocks / Until end of stock