

2191

HSSE DIN 376

M
DIN 13

Form.
E




ToL.
6H

1,5XD

D

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
										25-35							

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

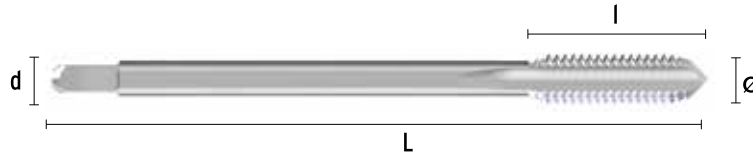

Ø	P	L mm	l mm	mm	d mm
M6,0	1,00	80	19	3,40	4,5
M8,0	1,25	90	22	4,90	6,0
M10,0	1,50	100	24	5,50	7,0

Ø	P	L mm	l mm	mm	d mm
M12,0	1,75	110	29	7,00	9,0
M14,0	2,00	110	30	9,00	11,0
M16,0	2,00	110	32	9,00	12,0