

2206

HSSE DIN 5156

+0,1

G
ISO 228

Form.
E




1,5XD

D

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

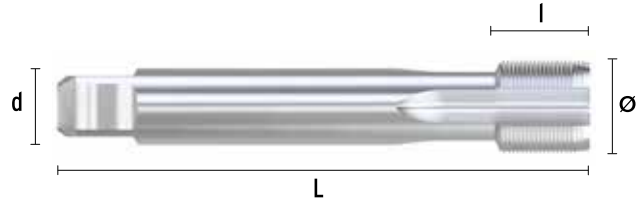

Ø	P	L mm	l mm	mm	d mm
3/8	19,00	100	22	9,00	12,0
1/2	14,00	125	25	12,00	16,0
5/8	14,00	125	25	14,50	18,0

Ø	P	L mm	l mm	mm	d mm
3/4	14,00	140	28	16,00	20,0
7/8	14,00	150	28	18,00	22,0

*Hasta fin de existencias / Jusqu'à epuïsement des stocks / Until end of stock