

2216

HSSE-PM DIN 371

A>12%

M
DIN 13

Form.
C





Tol.
6GX

1,5XD


R

TIN+

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
● 15-45	● 15-25			● 10-25					● 15-40	● 15-30	● 20-40			○ 10-20			

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

MICRO FINISH
THREADING TECHNOLOGY

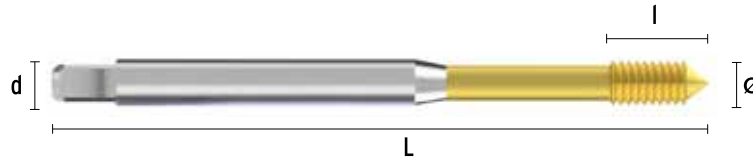

Ø	P	L mm	I mm	mm	d mm
M3,0	0,50	56	10	2,70	3,5
M4,0	0,70	63	7	3,40	4,5
M5,0	0,80	70	8	4,90	6,0

Ø	P	L mm	I mm	mm	d mm
M6,0	1,00	80	10	4,90	6,0
M8,0	1,25	90	13	6,20	8,0
M10,0	1,50	100	15	8,00	10,0