

2242

HSSE DIN 371

Vg
DIN 7756

Form.
C




1,5XD



P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
● 10-25	○ 10-15					○ 10-15	○ 10-15			○ 10-20							

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

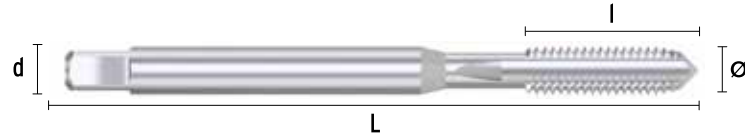

Ø	P	L mm	l mm	mm	d mm
5,0	36,00	70	12	4,90	6,0
5,2	24,00	80	17	4,90	6,0

Ø	P	L mm	l mm	mm	d mm
6,0	32,00	80	14	5,50	7,0
8,0	32,00	80	16	6,20	8,0