

2301/5

HSS DIN 352

Izquierda / A gauche / Left hand

M-MF
DIN 13





Tol.
6H



P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
•									•	•							

Vc (m/min). • Optima / Optimun ○ Alternativo / Alternative

Macho 3°
 Taraud 3°
 Tap 3°
 Gewindebohrer 3° } **PVP = €3**

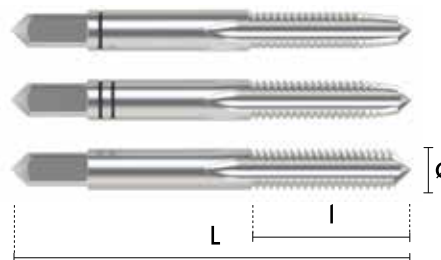

Ø	P	Nº	L mm	I mm	mm	d mm
M3,0	0,50	3	40	11	2,70	3,5
M4,0	0,70	3	45	13	3,40	4,5
M5,0	0,80	3	50	16	4,90	6,0
M6,0	1,00	3	56	19	4,90	6,0
M7,0	1,00	3	56	19	4,90	6,0
M8,0	1,00	2	63	22	4,90	6,0
M8,0	1,25	3	63	22	4,90	6,0
M9,0	1,25	3	63	22	5,50	7,0
M10,0	1,00	2	63	20	5,50	7,0
M10,0	1,25	2	70	24	5,50	7,0
M10,0	1,50	3	70	24	5,50	7,0
M12,0	1,25	2	70	22	7,00	9,0
M12,0	1,50	2	70	22	7,00	9,0
M12,0	1,75	3	75	29	7,00	9,0

Ø	P	Nº	L mm	I mm	mm	d mm
M14,0	1,25	2	70	22	9,00	11,0
M14,0	1,50	2	70	22	9,00	11,0
M14,0	2,00	3	80	30	9,00	11,0
M16,0	1,50	2	70	22	9,00	12,0
M16,0	2,00	3	80	32	9,00	12,0
M18,0	2,50	3	95	34	11,00	14,0
M20,0	1,50	2	80	22	12,00	16,0
M20,0	2,50	3	95	34	12,00	16,0
M22,0	1,50	2	80	22	14,50	18,0
M22,0	2,50	3	100	34	14,50	18,0
M24,0	1,50	2	90	22	14,50	18,0
M24,0	3,00	3	110	38	14,50	18,0
M27,0	3,00	3	110	38	16,00	20,0
M30,0	3,50	3	125	45	18,00	22,0