

2302

HSSE DIN 352

M
DIN 13



Tol.
6HX



TIN+

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
●	●	○		●		●	○		●	●				●			

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

Macho 3°
 Taraud 3°
 Tap 3°
 Gewindebohrer 3°

PVP = €/3

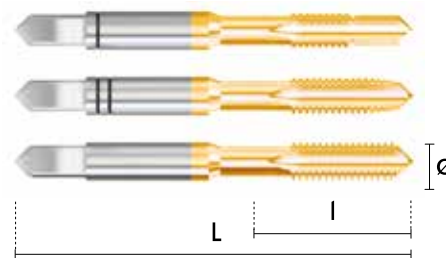

Ø	P	Nº	L mm	I mm	mm	d mm
M3,0	0,50	3	40	11	2,70	3,5
M4,0	0,70	3	45	13	3,40	4,5
M5,0	0,80	3	50	16	4,90	6,0
M6,0	1,00	3	56	19	4,90	6,0
M8,0	1,25	3	56	22	4,90	6,0
M10,0	1,50	3	70	24	5,50	7,0

Ø	P	Nº	L mm	I mm	mm	d mm
M12,0	1,75	3	75	29	7,00	9,0
M14,0	2,00	3	80	30	9,00	11,0
M16,0	2,00	3	80	32	9,00	12,0
M18,0	2,50	3	95	40	11,00	14,0
M20,0	2,50	3	95	40	12,00	16,0