


2304/5

HSS DIN 352

Izquierda / A gauche / Left hand

BSW
BS 84





P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
•									•	•							

Vc (m/min). • Optima / Optimun ○ Alternativo / Alternative

Macho 3°
 Taraud 3°
 Tap 3°
 Gewindebohrer 3°

PVP = €/3

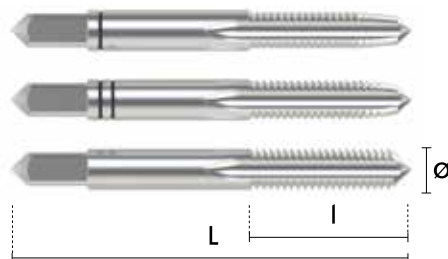

Ø	P	Nº	L mm	I mm	mm	d mm
1/8	40,00	3	40	12	2,70	3,5
5/32	32,00	3	45	14	3,40	4,5
3/16	24,00	3	50	18	4,90	6,0
1/4	20,00	3	50	19	4,90	6,0
5/16	18,00	3	56	22	4,90	6,0
3/8	16,00	3	70	24	5,50	7,0
7/16	14,00	3	70	24	6,20	8,0

Ø	P	Nº	L mm	I mm	mm	d mm
1/2	12,00	3	75	29	7,00	9,0
9/16	12,00	3	80	30	9,00	11,0
5/8	11,00	3	80	32	9,00	12,0
3/4	10,00	3	95	40	11,00	14,0
7/8	9,00	3	100	40	14,50	18,0
1"	8,00	3	110	50	14,50	18,0



Aceros
 Aciers
 Steels
 Stähle



Aceros Inox
 Aciers Inox
 Stainless Steels
 Edelstahl



Fundicion
 Fonte
 Cast Iron
 Gusseisen



Metales no ferrosos
 Métal non Ferreux
 Non Ferrous metals
 NE-Metalle



Titanio y Superalaciones
 Titanium et Supeallages
 Titanium and Superalloys
 Titan und Superlegierungen



Materiales Duros
 Matériels Durs
 Hard materials
 Hartmaterialien