

2305

HSS DIN 2181

BSF
BS 84





P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
•									•	•							

Vc (m/min). • Optima / Optimun ○ Alternativo / Alternative

Macho 3°
 Taraud 3°
 Tap 3°
 Gewindebohrer 3°

PVP = €12

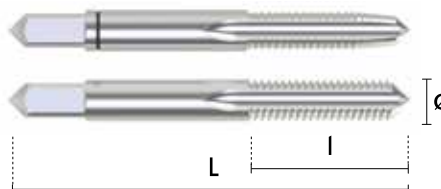

Ø	P	Nº	L mm	l mm	mm	d mm
3/16	32,00	2	50	14	4,90	6,0
1/4	26,00	2	50	18	4,90	6,0
5/16	22,00	2	56	22	4,90	6,0
3/8	20,00	2	63	22	5,50	7,0
7/16	18,00	2	63	22	6,20	8,0
1/2	16,00	2	75	24	7,00	9,0
9/16	16,00	2	80	28	9,00	11,0

Ø	P	Nº	L mm	l mm	mm	d mm
5/8	14,00	2	80	28	9,00	12,0
3/4	12,00	2	95	32	11,00	14,0
7/8	11,00	2	100	36	14,50	18,0
1"	10,00	2	110	40	14,50	18,0
1", 1/8	9,00	2	110	22	18,00	22,0
1", 1/4	9,00	2	110	22	18,00	22,0
1", 1/2	8,00	2	125	40	24,00	32,0