

2306/5

HSS DIN 5157

Izquierda / A gauche / Left hand

G
ISO 228





P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
•									•	•							

Vc (m/min). • Optima / Optimun ○ Alternativo / Alternative

Macho 3°
 Taraud 3°
 Tap 3°
 Gewindebohrer 3°

PVP = €12

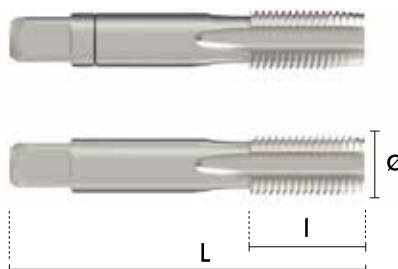

Ø	P	Nº	L mm	I mm	mm	d mm
1/8	28,00	2	63	20	5,50	7,0
1/4	19,00	2	70	22	9,00	11,0
3/8	19,00	2	70	22	9,00	12,0
1/2	14,00	2	80	22	12,00	16,0

Ø	P	Nº	L mm	I mm	mm	d mm
5/8	14,00	2	80	22	14,50	18,0
3/4	14,00	2	90	22	16,00	20,0
1"	11,00	2	100	25	20,00	25,0