

2307/5

HSS DIN 352

Izquierda / A gauche / Left hand

UNC
ANSI/ASME
B1.1





Tol.
2B

LH



P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
•									•	•							

Vc (m/min). • Optima / Optimun ○ Alternativo / Alternative

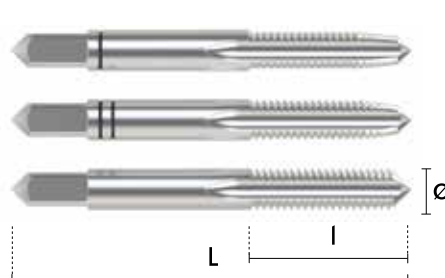

Ø	P	Nº	L mm	I mm	∅ mm	d mm
1/4	20,00	3	50	19	4,90	6,0
5/16	18,00	3	56	22	4,90	6,0
3/8	16,00	3	70	24	5,50	7,0
7/16	14,00	3	70	24	6,20	8,0
1/2	13,00	3	75	29	7,00	9,0

Ø	P	Nº	L mm	I mm	∅ mm	d mm
9/16	12,00	3	80	30	9,00	11,0
5/8	11,00	3	80	32	9,00	12,0
3/4	10,00	3	95	40	11,00	14,0
7/8	9,00	3	100	40	14,50	18,0
1"	8,00	3	110	50	14,50	18,0

P Aceros
Aciers
Steels
Stähle

M Aceros Inox
Aciers Inox
Stainless Steels
Edelstahl

K Fundicion
Fonte
Cast Iron
Gusseisen

N Metales no ferrosos
Métal non Ferraux
Non Ferrous metals
NE-Metalle

S Titanio y Superalcaciones
Titaneum et Supeallages
Titanium and Superalloys
Titan und Superlegierungen

H Materiales Duros
Materiels Durs
Hard materials
Hartmaterialien