

2310

HSS DIN 2181

UNEF
 ANSI/ASME
 B1.1





Tol.
2B

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
•									•	•							

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

Macho 3°
 Taraud 3°
 Tap 3°
 Gewindebohrer 3°

PVP = €/Z

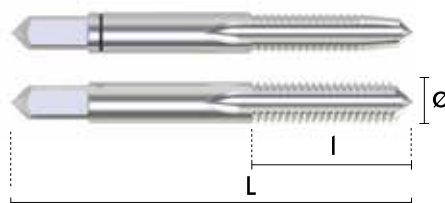

Ø	P	Nº	L mm	I mm	mm	d mm
1/4	32,00	2	56	14	4,90	6,0
5/16	32,00	2	56	18	4,90	6,0
3/8	32,00	2	63	20	5,50	7,0
7/16	28,00	2	63	20	6,20	8,0
1/2	28,00	2	70	22	7,00	9,0

Ø	P	Nº	L mm	I mm	mm	d mm
9/16	24,00	2	70	22	9,00	11,0
5/8	24,00	2	70	22	9,00	12,0
3/4	20,00	2	80	22	11,00	14,0
1"	20,00	2	90	22	14,50	18,0

*Hasta fin de existencias / Jusqu'à épuisement des stocks / Until end of stock