

2315

HSS DIN 2184

UN

ANSI/ASME
 B1.1





Tol.
2B

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
•									•	•							

Vc (m/min). • Optima / Optimun ○ Alternativo / Alternative

Macho 3°
 Taraud 3°
 Tap 3°
 Gewindebohrer 3°

PVP = € / 2

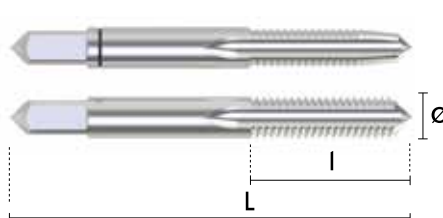

Ø	P	Nº	L mm	l mm	mm	d mm
1"1/8	8,00	2	125	40	18,00	22,0
1"1/4	8,00	2	125	40	18,00	22,0
1"3/8	8,00	2	125	40	22,00	28,0
1"1/2	8,00	2	125	40	24,00	32,0

Ø	P	Nº	L mm	l mm	mm	d mm
1"5/8	8,00	2	125	40	24,00	32,0
1"3/4	8,00	2	125	40	29,00	36,0
2"	8,00	2	140	40	32,00	40,0

*Hasta fin de existencias / Jusqu'à épuisement des stocks / Until end of stock