

2701

HSS ISO 529


Tol.
4H

EG-M
(STI)

Form.
D

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
•									•	•							

Vc (m/min). • Optima / Optimun ○ Alternativo / Alternative

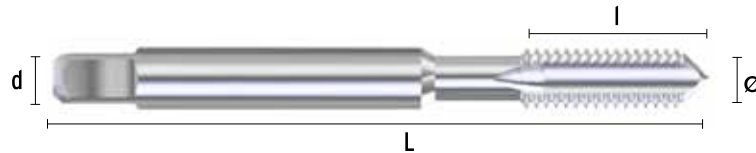

Ø	P	L mm	l mm	∠ mm	d mm
M2,0	0,40	44,5	9,5	2,24	2,80
M2,2	0,45	44,5	9,5	2,24	2,80
M2,5	0,45	48	11	2,50	3,15
M3,0	0,50	53	13	3,15	4,00
M3,5	0,60	53	13	3,55	4,50
M4,0	0,70	58	16	4,00	5,00
M5,0	0,80	66	19	5,00	6,30
M6,0	1,00	72	22	6,30	8,00
M7,0	1,00	72	22	7,10	9,00
M8,0	1,00	80	24	8,00	10,00
M8,0	1,25	80	24	8,00	10,00
M9,0	1,25	85	25	6,30	8,00
M10,0	1,00	85	25	6,30	8,00
M10,0	1,25	85	25	6,30	8,00
M10,0	1,50	89	29	7,10	9,00
M11,0	1,50	89	29	7,10	9,00
M12,0	1,00	95	30	9,00	11,20
M12,0	1,25	95	30	9,00	11,20
M12,0	1,50	95	30	9,00	11,20
M12,0	1,75	95	30	9,00	11,20

Ø	P	L mm	l mm	∠ mm	d mm
M14,0	1,00	102	32	10,00	12,50
M14,0	1,25	102	32	10,00	12,50
M14,0	1,50	102	32	10,00	12,50
M14,0	2,00	102	32	10,00	12,50
M15,0	1,50	102	32	10,00	12,50
M15,0	2,00	112	37	11,20	14,00
M16,0	1,50	104	29	11,20	14,00
M16,0	2,00	112	37	11,20	14,00
M18,0	1,50	104	29	11,20	14,00
M18,0	2,00	104	29	11,20	14,00
M18,0	2,50	118	38	12,50	16,00
M20,0	1,50	113	33	12,50	16,00
M20,0	2,00	113	33	12,50	16,00
M20,0	2,50	118	38	12,50	16,00
M22,0	1,50	120	35	14,00	18,00
M22,0	2,00	120	35	14,00	18,00
M22,0	2,50	130	45	14,00	18,00
M24,0	1,50	120	35	14,00	18,00
M24,0	2,00	127	37	16,00	20,00
M24,0	3,00	138	48	16,00	20,00