


2702 **HSS ISO 529** **Tol. 3B** **EG-UNC (STI)** **Form. D**

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
•									•	•							

Vc (m/min). • Optima / Optimun ○ Alternativo / Alternative

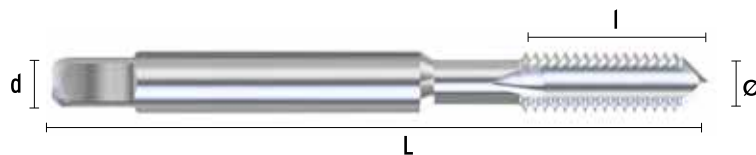

Ø	P	L mm	l mm	mm	d mm
N°2	56,00	48	9,5	2,50	3,15
N°4	40,00	53	13	3,15	4,00
N°6	32,00	58	16	4,00	5,00
N°8	32,00	62	17	4,50	5,60
N°10	24,00	66	19	5,00	6,30
N°12	24,00	66	19	5,60	7,10
1/4	20,00	72	22	6,30	8,00
5/16	18,00	80	24	8,00	10,00
3/8	16,00	85	25	6,30	8,00

Ø	P	L mm	l mm	mm	d mm
7/16	14,00	95	30	9,00	11,20
1/2	13,00	102	32	10,00	12,50
9/16	12,00	112	37	11,20	14,00
5/8	11,00	112	37	11,20	14,00
11/16	11,00	112	37	11,20	14,00
3/4	10,00	118	38	12,50	16,00
7/8	9,00	130	45	14,00	18,00
1"	8,00	138	48	16,00	20,00