

3120

HSSE W





Vc (m/min)	P				M		K			N				S		H		
	<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
										60-200		60-100	50-80					
K	1	1	0,7	0,7	0,7	1	1	1	0,7	1,3	1	1	1,3	0,7	0,7	0,7	0,7	0,7
fz	Ap	Ae	Ø1	Ø2	Ø3	Ø4	Ø5	Ø6	Ø8	Ø10	Ø12	Ø14	Ø16	Ø18	Ø20	Ø25	Ø32	Ø40
	1	-	-		0,015	0,020	0,025	0,030	0,050	0,050	0,055	0,055	0,060	0,060	0,065	0,065	0,070	
	2																	
	3																	
	4																	
	5																	
	6																	

vf(mm/min) = rpm x Z x fz x K
rpm = (Vc x 1000) / (Ø x π)

● Optima / Optimun ○ Alternativo / Alternative

Fresado
Fraisage
Milling
Fräsen

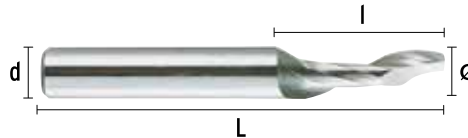

Ø mm	d mm	L mm	l mm	
3,00	8	60	12	1
4,00	8	60	12	1
5,00*	6	60	12	1
5,00	8	60	14	1

Ø mm	d mm	L mm	l mm	
6,00	8	60	14	1
7,00	8	60	14	1
8,00	8	80	14	1
10,00	8	80	14	1

*(Hasta fin de existencias / Jusqu'à épuisement des stocks / While supplies last)