


6101 HP1

- > **Componentes totalmente templados y rectificados.**
Composants entièrement trempés et rectifiés.
Fully tempered and rectified components.
- > **Uso en taladros de precisión estacionarios, fresadoras.**
Pour perçages de précision stationnaires, fraiseuses.
For use with stationary precision drills, milling machines.
- > **Excentricidad máxima 0,04 mm.**
Excentricité maximum de 0,04 mm.
Maximum eccentricity 0.04 mm.

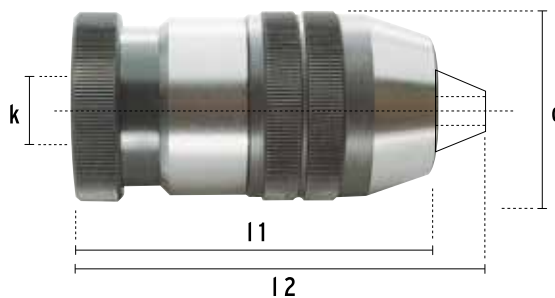

Ø mm	d mm		k Int.	l1 mm	l2 mm		Husillo Arbre Spindle	Juego de garras Jeux de griffes Set of claws
0,00 - 10,00	41	B16	1/2" - 20H*	81	89	1		
1,00 - 13,00	46	B16	1/2" - 20H*	88	89	1		
3,00 - 16,00	55	B16, B18		95	107	1		

*(Hasta fin de existencias / Jusqu'à épuisement des stocks / While supplies last)