


6102 HP2

- > **Componentes parcialmente templados y rectificados.**
Composants partiellement trempés et rectifiés.
Partially tempered and rectified components.
- > **Uso industrial para taladros fijos y portátiles.**
Usage industriel pour perceuses fixes et portables.
For industrial use with fixed and portable drills.
- > **Excentricidad máxima 0,20 mm.**
Excentricité maximum de 0,20 mm.
Maximum eccentricity 0.20 mm.

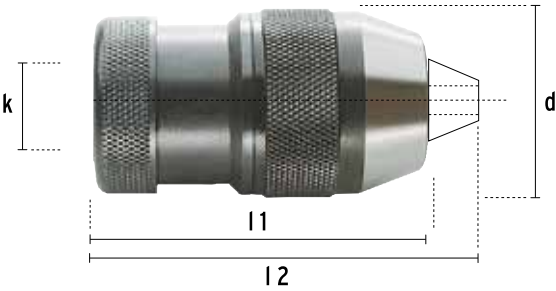

	Ø mm	d mm		k Int.	l1 mm	l2 mm		Husillo Arbre Spindle	Juego de garras Jeux de griffes Set of claws
	0,00 - 10,00	39	B12	1/2" - 20H 3/8" - 24H	73	80	1		
	2,00 - 13,00	46	B16	1/2" - 20H 3/8" - 24H	87	95	1		
	3,00 - 16,00	51	B16,B18	5/8" - 16H 1/2" - 20H	102	115	1		
	5,00 - 20,00	56	B18	-	95	110	1		