


1175


HM-MD DIN 6537 S

3XD



Avance/Feed	P				M		K			N				S		H		
	<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
	●	●	●	●	●	●	●	●	●					○	●	○	○	○
	40-110	35-75	30-50	25-40	35-75		60-100	70-110	40-60					20-25	20-75	25-35	15-25	
Ø2	0,08-0,14	0,06-0,10	0,04-0,08	0,03-0,06	0,04-0,08		0,08-0,12	0,06-0,10	0,03-0,06					0,03-0-05	0,03-0,08	0,03-0,06	0,01-0,04	
Ø5	0,16-0,28	0,12-0,20	0,08-0,16	0,06-0,12	0,08-0,16		0,16-0,24	0,12-0,20	0,06-0,12					0,05-0,08	0,05-0,16	0,06-0,12	0,04-0,08	
Ø10	0,25-0,45	0,20-0,32	0,12-0,26	0,08-0,20	0,12-0,26		0,25-0,38	0,20-0,32	0,08-0,20					0,08-0,12	0,08-0,26	0,08-0,20	0,06-0,10	
Ø15	0,32-0,55	0,25-0,40	0,15-0,32	0,10-0,25	0,15-0,32		0,32-0,48	0,25-0,40	0,10-0,25					0,12-0,16	0,12-0,32	0,10-0,25	0,08-0,12	
Ø20	0,4-0,68	0,30-0,50	0,18-0,40	0,12-0,30	0,18-0,40		0,40-0,60	0,30-0,50	0,12-0,30					0,16-0,20	0,16-0,40	0,12-0,30	0,10-0,18	

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

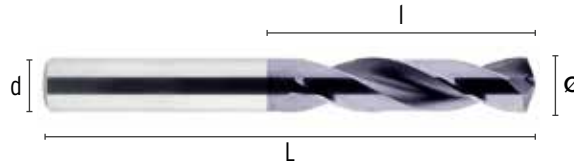

Ø mm	d mm	L mm	l mm	
16,80	18,00	123,00	73,00	1
17,00	18,00	123,00	73,00	1
17,50	18,00	123,00	73,00	1
17,80	18,00	123,00	73,00	1
18,00	18,00	123,00	73,00	1

Ø mm	d mm	L mm	l mm	
18,50	20,00	131,00	79,00	1
18,80	20,00	131,00	79,00	1
19,00	20,00	131,00	79,00	1
19,50	20,00	131,00	79,00	1
20,00	20,00	131,00	79,00	1