

2103/5

HSSE DIN 376/374

Izquierda
 a gauche / lefthand

M-MF
DIN 13

Form.
B
 "Gun"




Tol.
6H

3XD

D

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
● 10-25	○ 10-15			○ 5-10			○ 10-15		○ 10-15	● 10-20		○ 10-15					

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

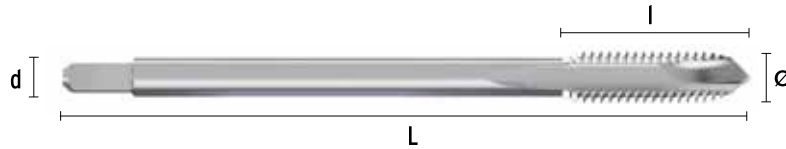

Ø	P	L mm	l mm	mm	d mm
M8,0	1,00	90	22	4,90	6,0
M10,0	1,00	90	22	4,90	7,0
M10,0	1,25	100	24	5,50	7,0
M12,0	1,25	100	22	7,00	9,0
M12,0	1,75	110	29	7,00	9,0
M16,0	1,50	100	22	9,00	12,0
M16,0	2,00	110	30	9,00	12,0

Ø	P	L mm	l mm	mm	d mm
M18,0	1,50	110	25	11,00	14,00
M20,0	1,50	125	25	12,00	16,00
M20,0	2,00	140	27	12,00	16,00
M20,0	2,50	140	34	12,00	16,00
M22,0	2,00	140	27	14,50	18,00
M24,0	2,00	140	27	14,50	18,00
M24,0	3,00	160	38	14,50	18,00